

TPRIII M/MT

Mechanical thermostatic panel heaters



Designed to complement Creda storage heaters, TPRIII mechanical thermostatic panels are ideal for any areas which require heating for short periods of the day. Cost effective, they offer an efficient way to extend existing heating systems and come with various control options to suit different applications.


Key features

- TPRIII (MT) models have programmable 24 hour timers
- TPRIII (MT7) model has a programmable 7 day timer
- Full or half power output selection
- Adjustable thermostat (5-30°C)
- Convected heat for rapid warm-up. Suitable for domestic or commercial use
- Frost protection setting
- Front heat outlet grille for efficient heat circulation
- Lockable dust cover
- Detachable hinged wall mounting bracket for fast installation and easy cleaning



Technical Specification

- Element – mineral-filled sheathed type
- Thermostat – capillary type
- Finish – white powder coated steel
- Protection – auto reset thermal cut-out
- IP rating – IPX4 (splashproof)
- Supply – 230/240V AC single phase

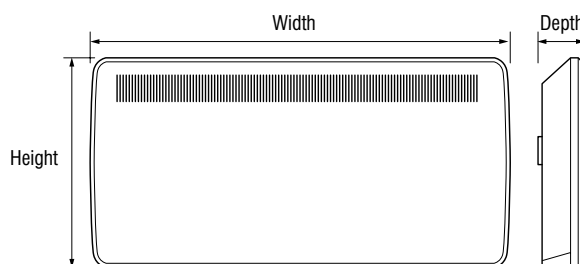

Range options



TPRIII M mechanical thermostat (all ratings).



TPRIII MT mechanical thermostat and 24hr timer (all ratings).



TPRIII MT7 mechanical thermostat with 7day timer (2kW model only).

Product selector

Model	Rating (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
Thermostat only models					
TPRIII 500M	0.5	430	450	108	4.8
TPRIII 750M	0.75	430	620	108	6.2
TPRIII 1000M	1	430	620	108	6.2
TPRIII 1250M	1.25	430	690	108	6.6
TPRIII 1500M	1.5	430	690	108	6.6
TPRIII 2000M	2	430	860	108	8.0
Timer models 24hr					
TPRIII 500MT	0.5	430	450	108	4.8
TPRIII 750MT	0.75	430	620	108	6.2
TPRIII 1000MT	1	430	620	108	6.2
TPRIII 1250MT	1.25	430	690	108	6.6
TPRIII 1500MT	1.5	430	690	108	6.6
TPRIII 2000MT	2	430	860	108	8.0
Timer model 7 day					
TPRIII 2000MT7	2	430	860	108	8.0